
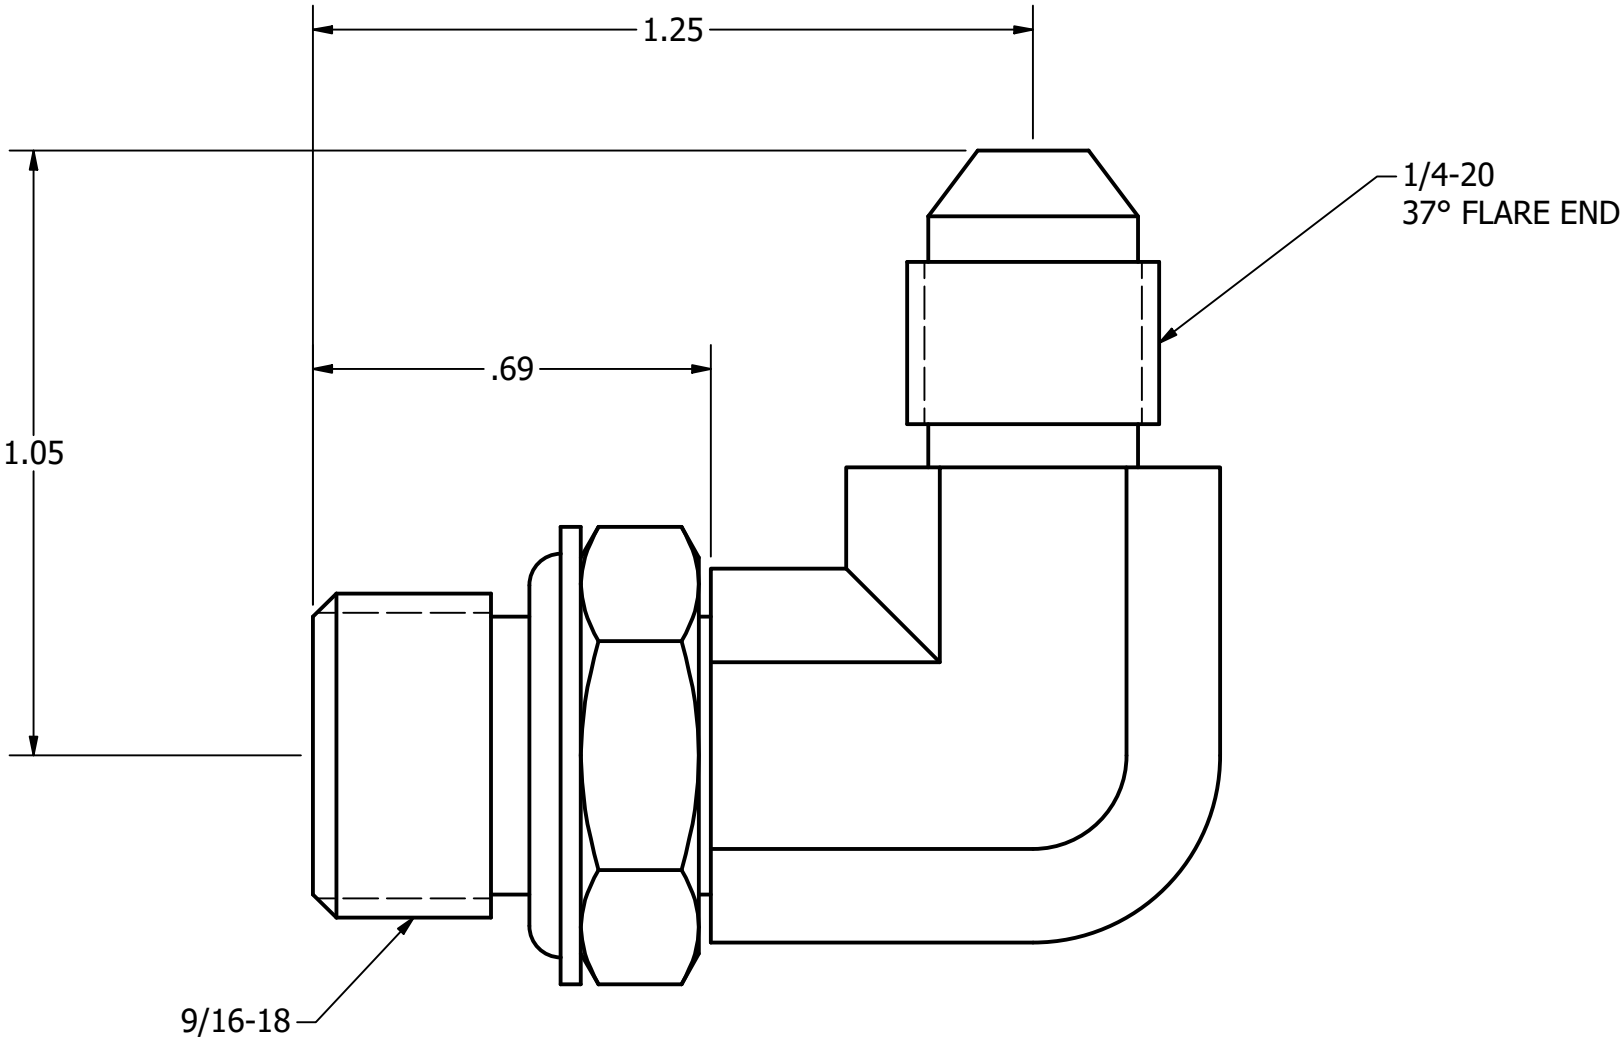
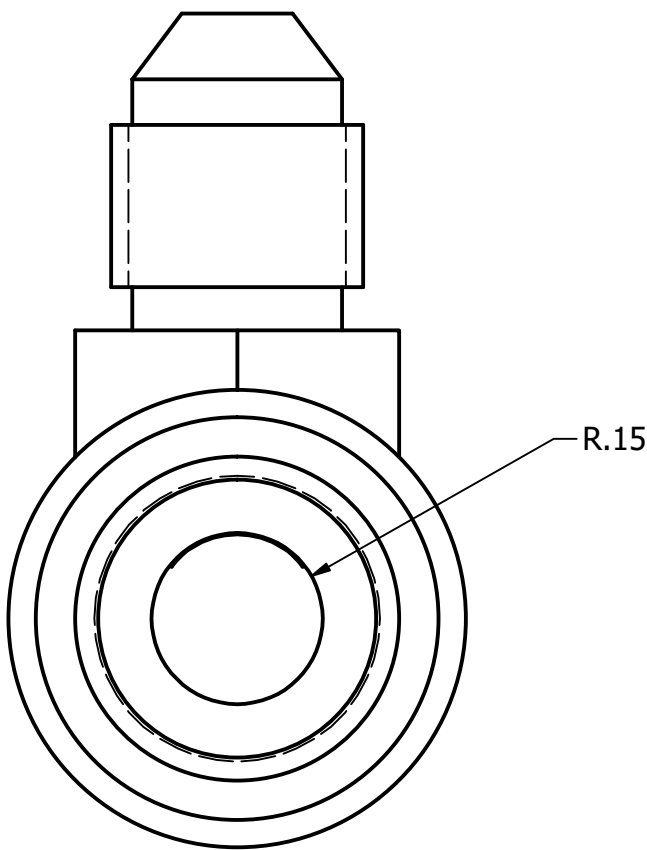


ACCEPTED VENDORS:  
MOTION & FLOW CONTROL PRODUCTS  
834 S.E. FRONTAGE RD.  
FORT COLLINS, CO 80524

MANUFACTURER:  
PARKER-HANNIFIN  
WWW.PARKER.COM

MFR'R P/N: 4-6\_C50X-S (PROVIDED WITH O-RING AND JAM NUT)  
MATERIAL: ZINC-NICKEL PLATED STEEL  
DYNAMIC PRESSURE: 6,000PSI

REVISION HISTORY					
DATE	REV	DESCRIPTION	AUTHOR	CHECKED BY	APPROVED
10/04/17	A	INITIAL RELEASE	EW	LS	JT
11/14/19	B	ADDED -2 & -3	CMK	<i>LS</i>	CMK

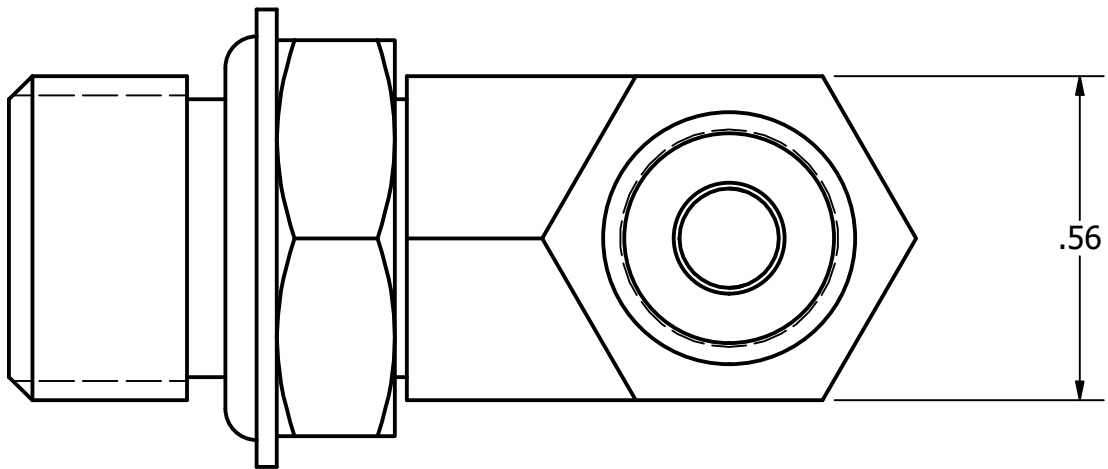


# -1 STRAIGHT THREAD ELBOW

**NOTE:**  
This drawing defines the overall geometry and performance specifications of the part/assembly, and constitutes the acceptance criteria thereof. Only the item(s) described in this document procured from the vendor and/or manufacturer listed hereon are approved for use. A substitute item shall not be used without prior approval. Conformance of hardware to these requirements is acceptable in lieu of vendor and/or manufacturer documentation.

—CONFIDENTIAL INFORMATION—  
THE INFORMATION AND DATA CONTAINED HEREIN IS PROPRIETARY AND IS SUBMITTED IN CONFIDENCE, AND SHALL NOT BE DISCLOSED, USED OR DUPLICATED FOR ANY PURPOSE, WHATSOEVER, WITHOUT THE PRIOR WRITTEN PERMISSION OF PARAVION TECHNOLOGY, INC.

PROTO

<div>Paravion<sup>®</sup> Technology Inc.</div> <div>DIMENSIONS IN INCHES TOLERANCES EXCEPT WHERE NOTED: X = ± .1 XX = ± .05 XXX = ± .010 ANGLES = ± 1° THREADS INTERNAL CLASS 2B EXTERNAL CLASS 2A</div>	TITLE STRAIGHT THREAD ELBOW			DRAWING NUMBER ES45003		
	DRAWN BY	CHK'D BY	APPR'D BY	DATE	REV	ECO
	EW	LS	JT	10/4/17	B	
					SHEET	
	DO NOT SCALE DRAWING © 2017 PARAVION TECH. INC. PARAVION IS A TRADEMARK OF PARAVION TECHNOLOGY INC.				1 OF 3	





-2 STRAIGHT THREAD ELBOW

ACCEPTED VENDORS:  
MOTION & FLOW CONTROL PRODUCTS  
834 S.E. FRONTAGE RD.  
FORT COLLINS, CO 80524

MANUFACTURER:  
PARKER-HANNIFIN  
WWW.PARKER.COM

MFR'R P/N: 4 C5OX-S (PROVIDED WITH O-RING AND JAM NUT)  
MATERIAL: ZINC-NICKEL PLATED STEEL (CHROMIUM-6 FREE)  
O-RING MATERIAL: NITRILE, 90 DUROMETER  
DYNAMIC PRESSURE: 6,000PSI

SPECIFICATIONS MET: SAE J514

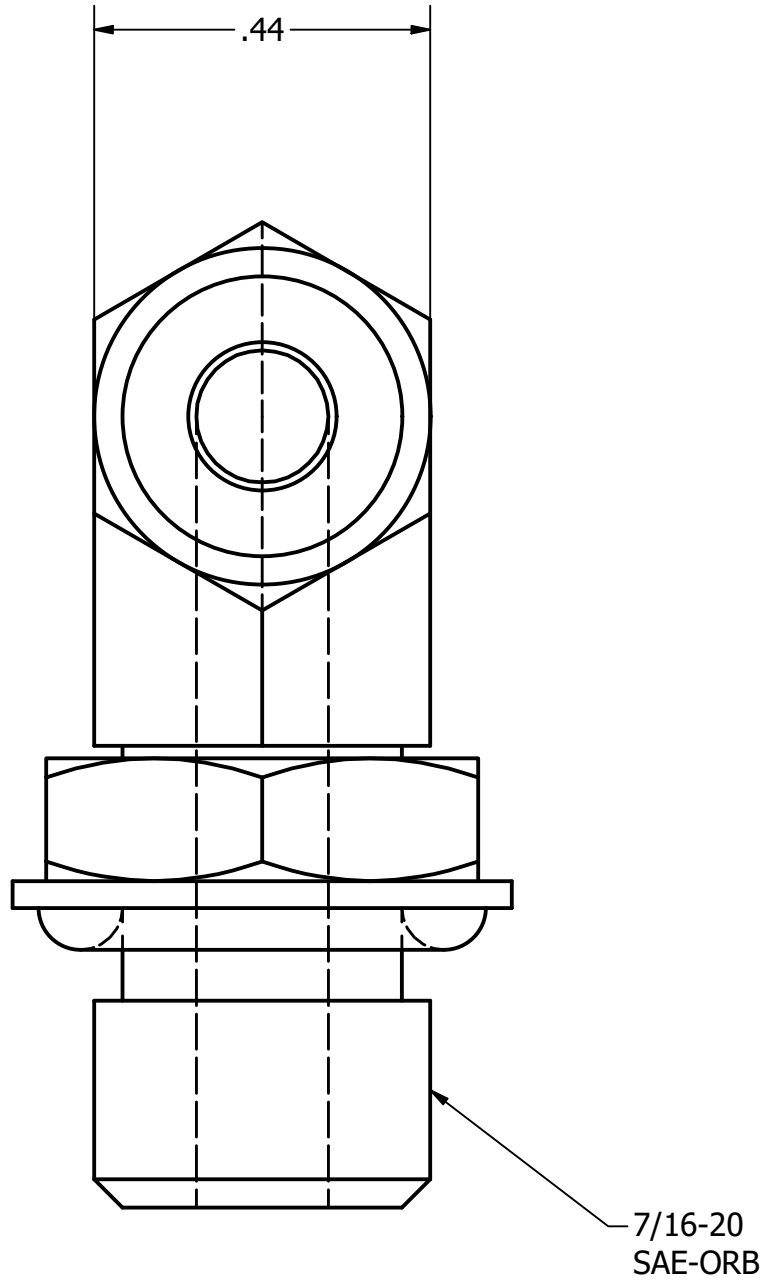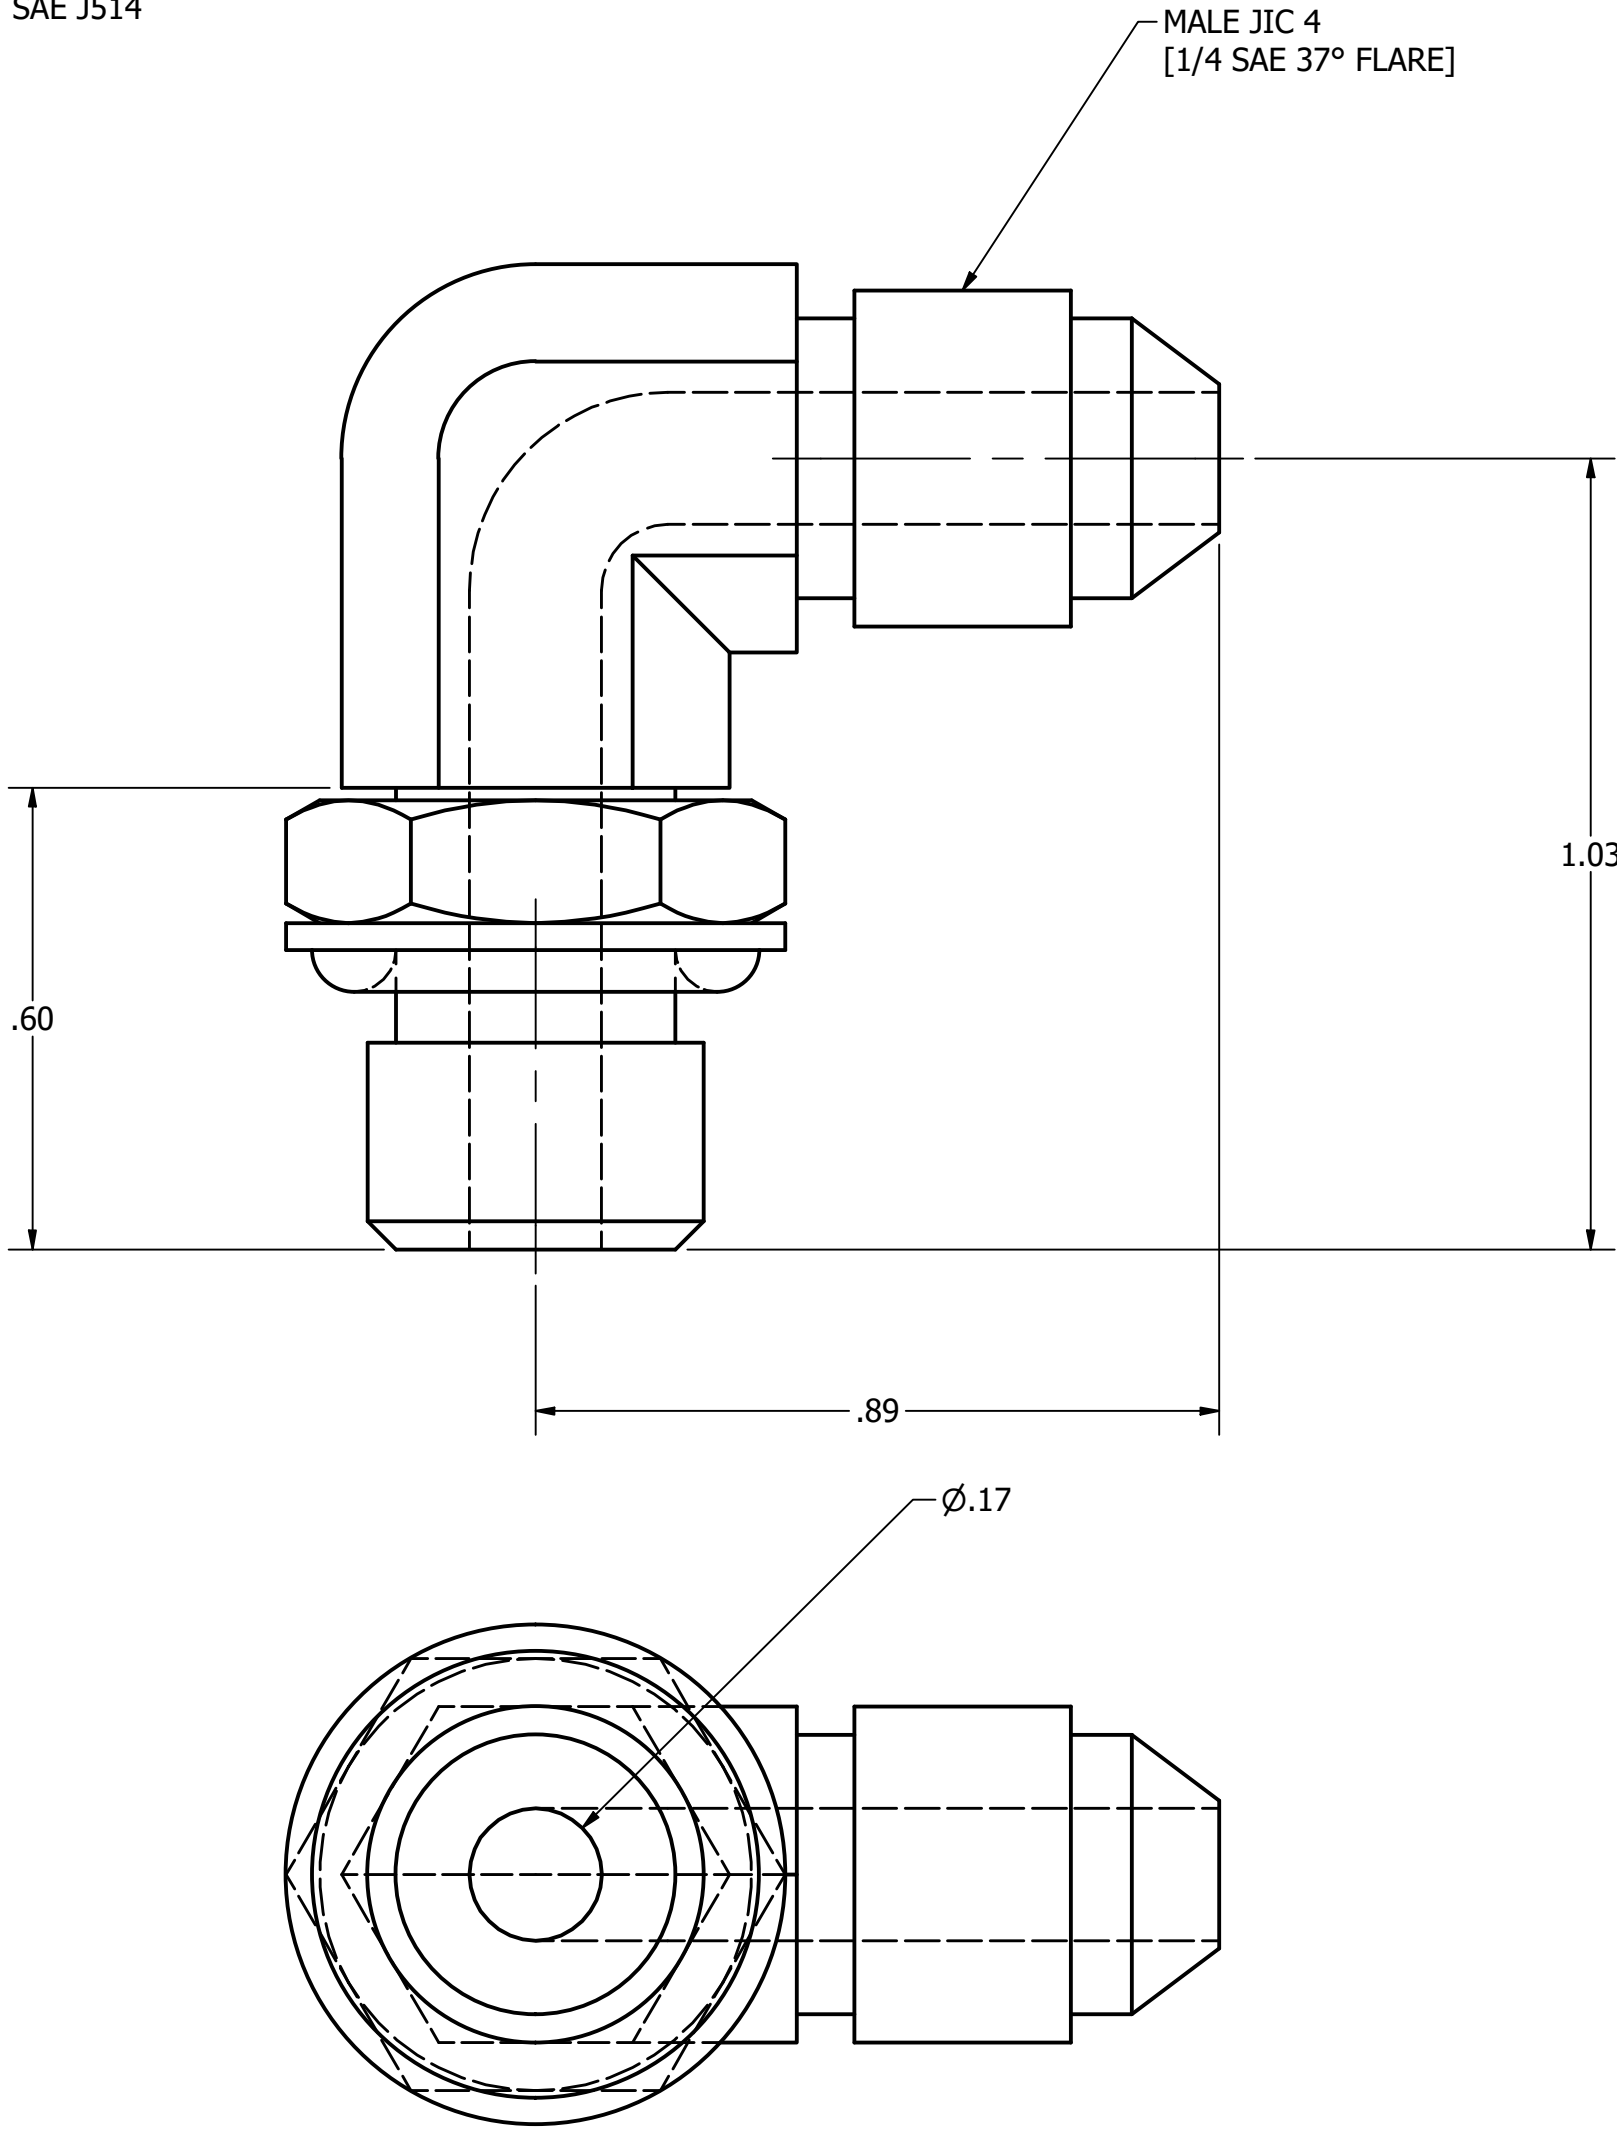

—CONFIDENTIAL INFORMATION—  
THE INFORMATION AND DATA CONTAINED HEREIN IS  
PROPRIETARY AND IS SUBMITTED IN CONFIDENCE; AND  
SHALL NOT BE DISCLOSED, USED OR DUPLICATED FOR ANY  
PURPOSE, WHATSOEVER, WITHOUT THE PRIOR WRITTEN  
PERMISSION OF PARAVION TECHNOLOGY, INC.

PROTO

<div>Paravion® Technology Inc.</div>		TITLE STRAIGHT THREAD ELBOW			DRAWING NUMBER ES45003		
<div>DIMENSIONS IN INCHES TOLERANCES EXCEPT WHERE NOTED: .X = ±.1 .XX = ±.05 .XXX= ±.010 ANGLES=± 1°</div> <div>THREADS: INTERNAL: CLASS 2B EXTERNAL: CLASS 2A</div>		DRAWN BY EW	CHK'D BY LS	APRVD. BY JT	DATE 10/4/17	REV B	ECO
		DO NOT SCALE DRAWING				SHEET	
		© 2017 PARAVION TECH. INC. PARAVION IS A TRADEMARK OF PARAVION TECHNOLOGY INC.				2 OF 3	



-3 STRAIGHT THREAD ELBOW

ACCEPTED VENDORS:  
MOTION & FLOW CONTROL PRODUCTS  
834 S.E. FRONTAGE RD.  
FORT COLLINS, CO 80524

MANUFACTURER:  
PARKER-HANNIFIN  
WWW.PARKER.COM


MFR'R P/N: 4 AOEX6-S (PROVIDED WITH O-RING AND JAM NUT)  
MATERIAL: ZINC-NICKEL PLATED STEEL (CHROMIUM-6 FREE)  
O-RING MATERIAL: NITRILE, 90 DUROMETER  
DYNAMIC PRESSURE: 6,000PSI

SPECIFICATIONS MET: SAE J514

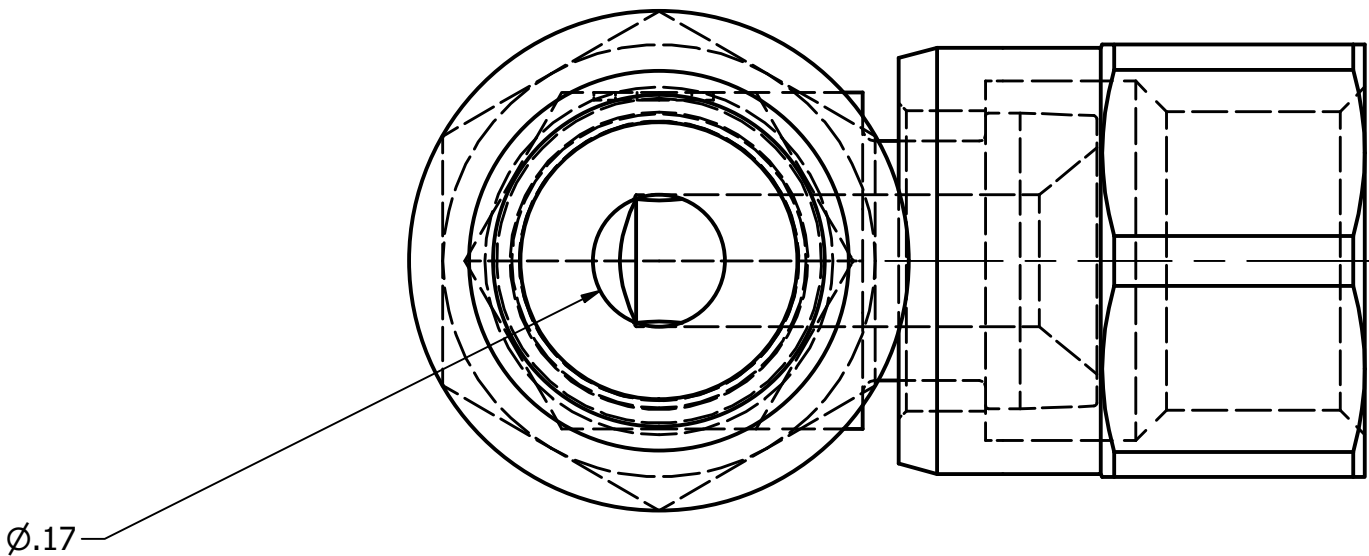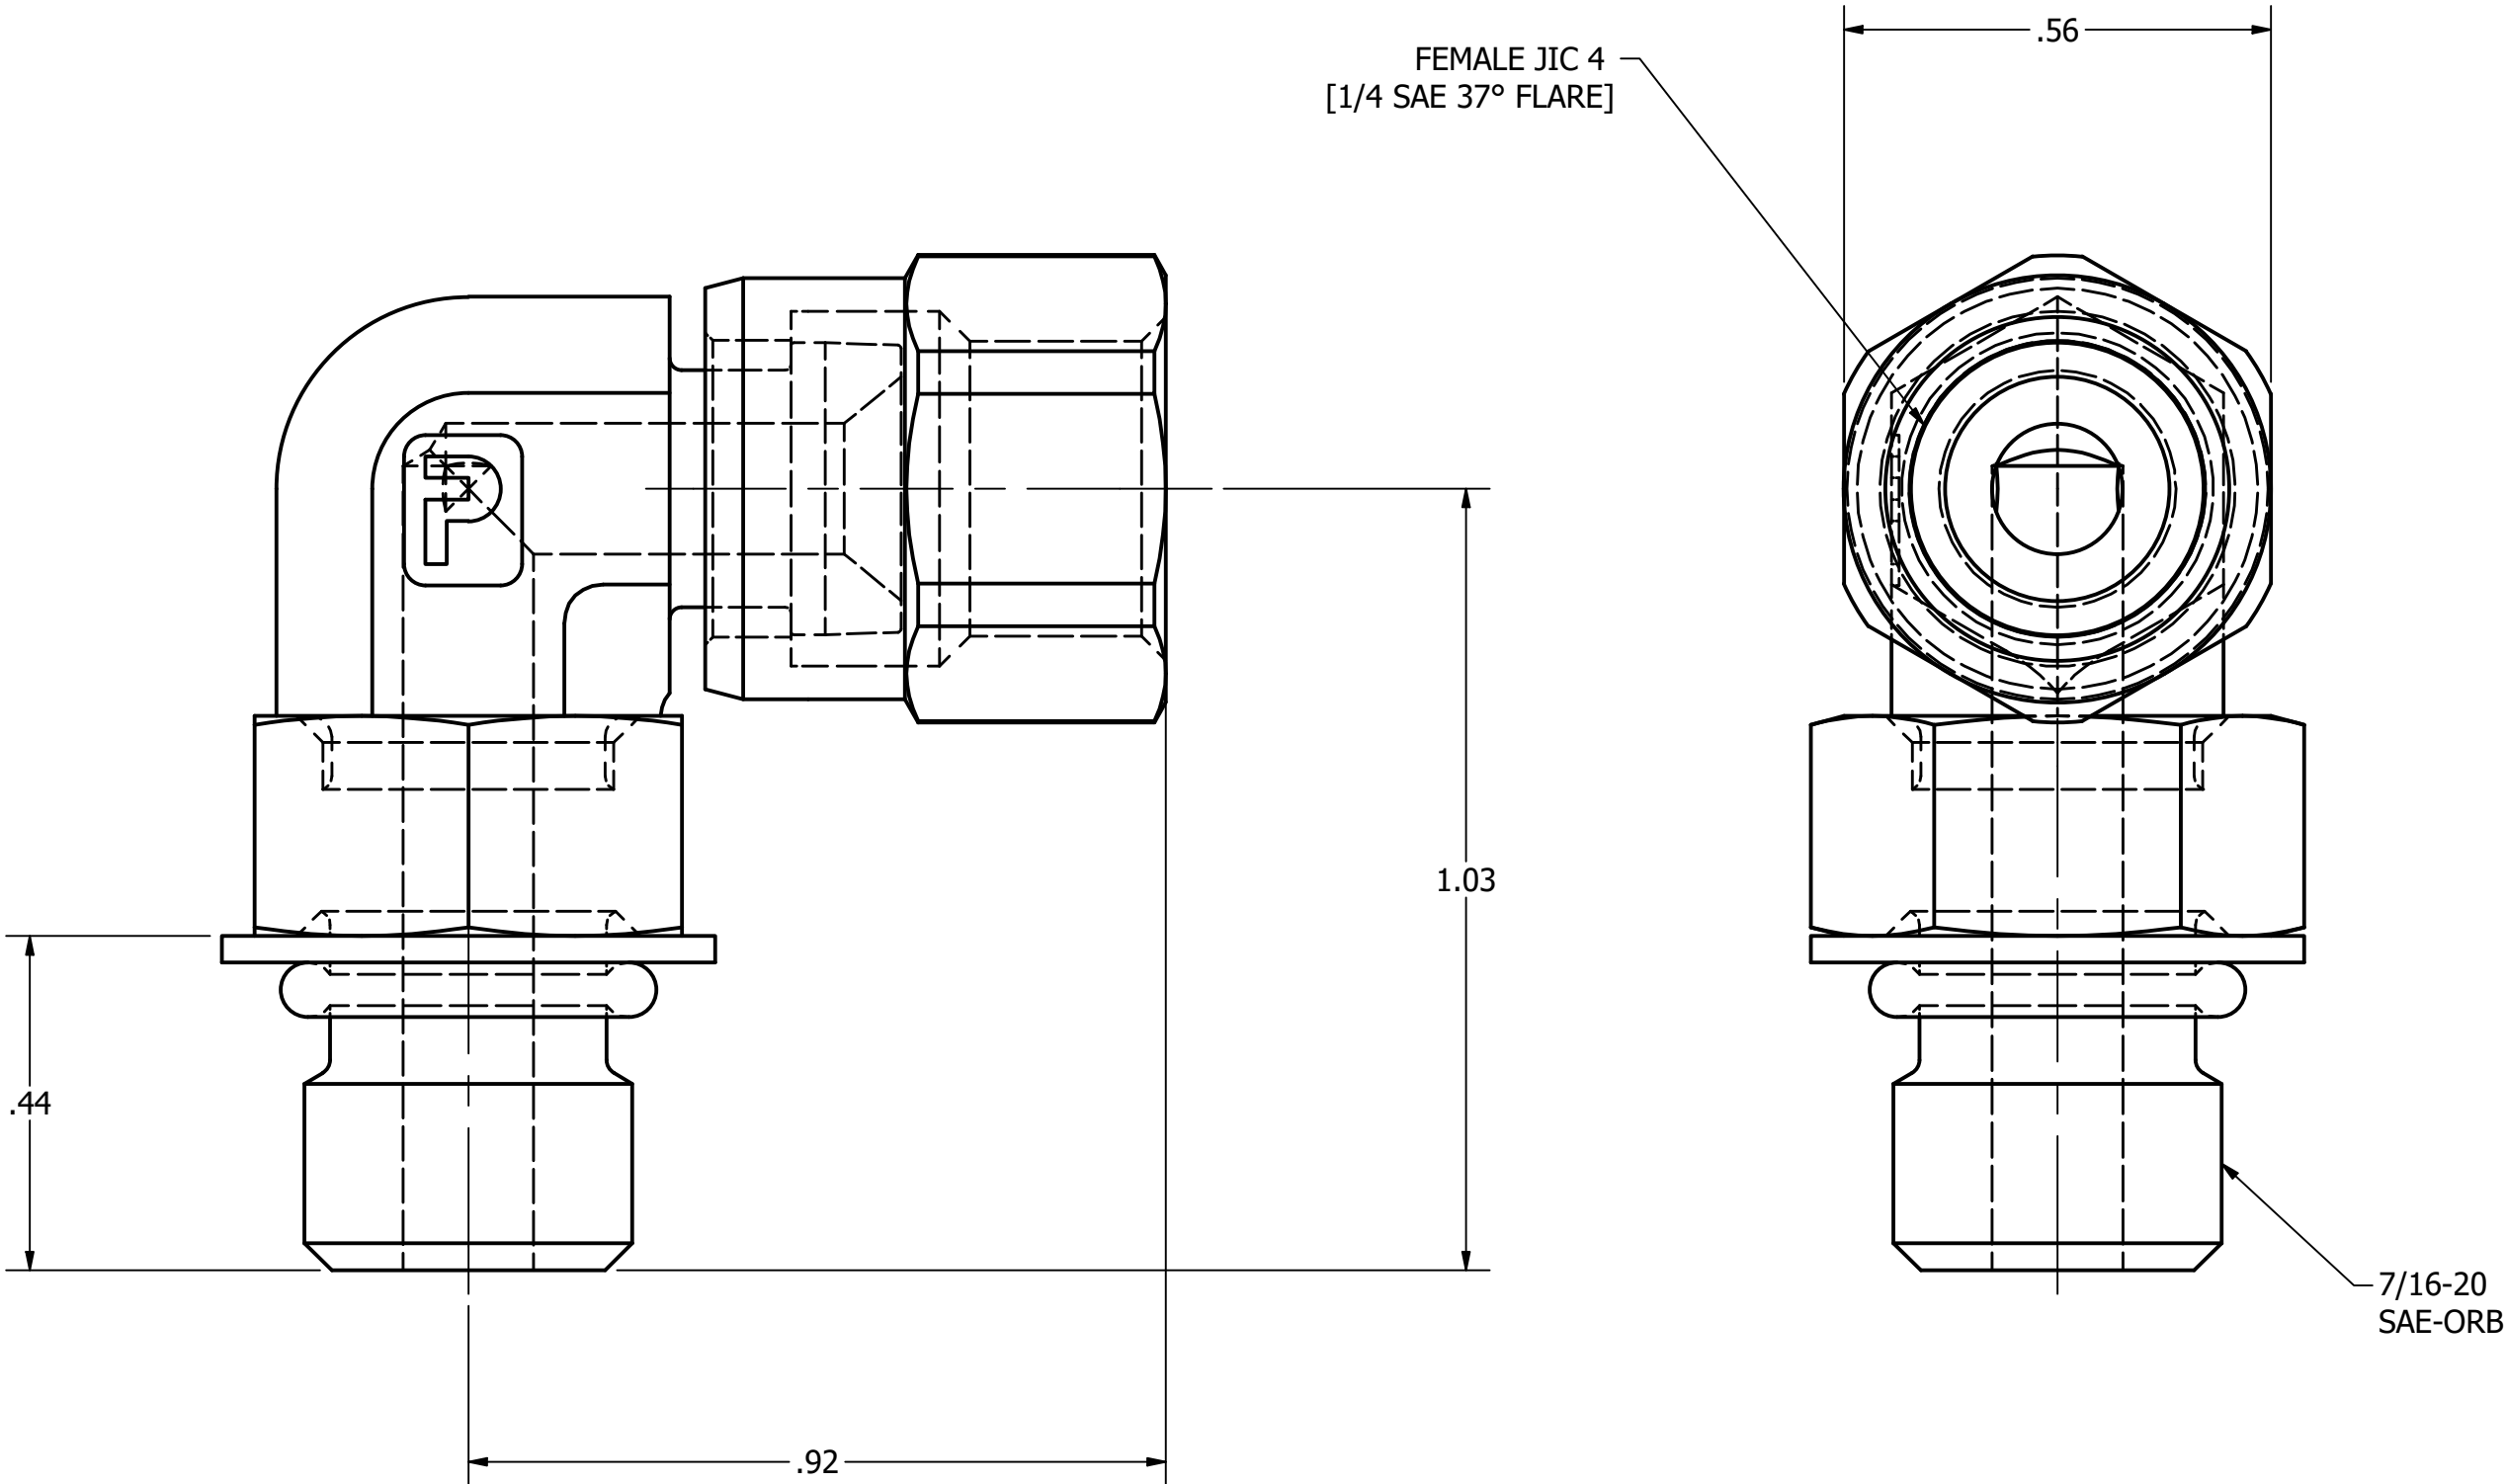

—CONFIDENTIAL INFORMATION—  
THE INFORMATION AND DATA CONTAINED HEREIN IS  
PROPRIETARY AND IS SUBMITTED IN CONFIDENCE; AND  
SHALL NOT BE DISCLOSED, USED OR DUPLICATED FOR ANY  
PURPOSE WHATSOEVER WITHOUT THE PRIOR WRITTEN  
PERMISSION OF PARAVION TECHNOLOGY, INC.

PROTO

<div>Paravion® Technology Inc.</div> <div>DIMENSIONS IN INCHES TOLERANCES EXCEPT WHERE NOTED: .X = ±.1 .XX = ±.05 .XXX= ±.010 ANGLES=± 1° THREADS: INTERNAL: CLASS 2B EXTERNAL: CLASS 2A</div>	TITLE STRAIGHT THREAD ELBOW				DRAWING NUMBER ES45003	
	DRAWN BY EW	CHK'D BY LS	APPR'D BY JT	DATE 10/4/17	REV B	ECO
	DO NOT SCALE DRAWING				SHEET	
	© 2017 PARAVION TECH. INC. PARAVION IS A TRADEMARK OF PARAVION TECHNOLOGY INC.				3 OF 3	
	<div>3RD ANGLE PROJECTION</div>					